

# Manufacturing and trading company «Ecopolymer»


109029, Moscow, st. Srednyaya Kalitnikovskaya, 28, bldg 2, fl 2 , rm 1, rm 10 Tel.: +7 (495) 710-86-22. E-mail: tpp@ecopolymer.com www.ecopolymer.com

# **QUESTIONNAIRE**


### FOR SURFACE SLUICE GATE SELECTION

	Position	
Tel	Fax	
<ol> <li>Required quantity pcs.</li> <li>Operating medium:</li> </ol>		
<ul><li></li></ul>	Natural water	
3. Material:		
☐ AISI 304	☐ AISI 321	AISI 316L
Other		
4. Installation type:		
Trench casing	Anchoring inside the channel	Attached
5. Channel wall material:	_	_
Mass concrete	Precast concrete	☐ Steel
6. Sealing direction:		
Unidirectional	Bidirectional	
7. Actuator:	☐ Manuel com	C Electric drive
Handwheel  8. Control system (only for 6)	Manual gear	☐ Electric drive
No	Open/Close	Adjustment
_	rature in the sluice gate installation	
>0 (indoor)	-25	-40
-60		

#### 10. Channel (opening) dimensions:

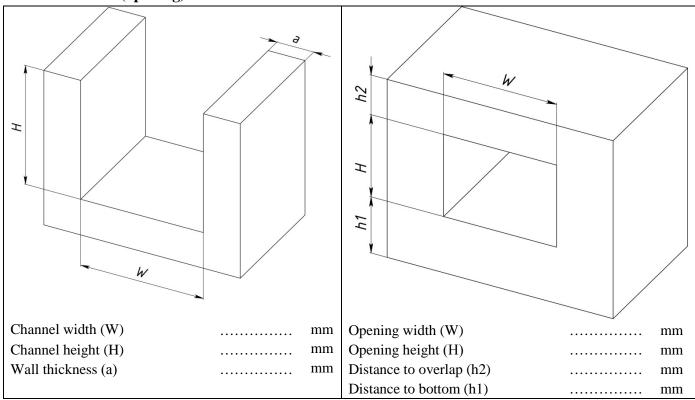

# 11. Sluice gate overall dimensions:

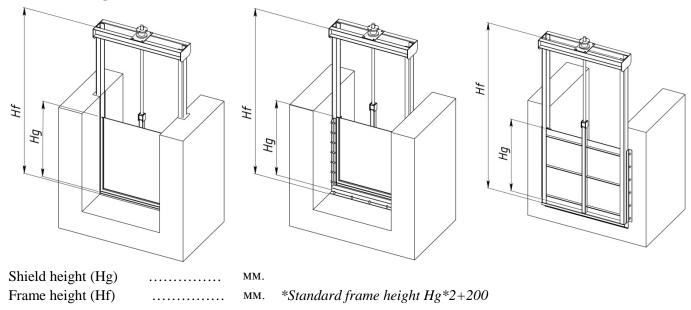

12. Additional information: